



DJS-T255P666PT~T270P666PT



■ Feature

1. Bypass diode minimizes the power drop by shade.
2. The conversion efficiency of solar cell is above 15.9%.
3. White tempered glass, EVA resin, weather proof film and anodized aluminum frame to provide efficient protection from the severest environmental conditions.
4. Waterproof (UL94, V-O). Perfect for grid applications.
5. Product guarantee 5 years.


■ SPECIFICATION

Type Of Module	DJS-T255P666PT ~ DJS-T270P666PT			
Nominal Power (Wp)	255	260	265	270
Tolerance (%)	Plus			
Open circuit Voltage (V)	39.86	40.19	40.39	40.72
Short circuit Current (A)	8.32	8.38	8.42	8.49
Maximum Power Voltage (V)	33.07	33.46	33.59	33.92
Maximum Power Current (A)	7.75	7.83	7.9	8
Module Efficiency (%)	14.21	14.49	14.77	15.05
Solar Cell Efficiency (%)	15.9	16.1	16.5	16.9
Series Fuse Rating (A)	15			
Terminal Box	IP65			
Maximum System Voltage (V)	IEC/UL 1000V / 600V			
Operating Temperature (°C)	-40 to 85			

* The measuring uncertainty of Pmax is ± 2%

■ Electrical Characteristics

Current-Voltage & Power-Voltage characteristics various irradiance levels

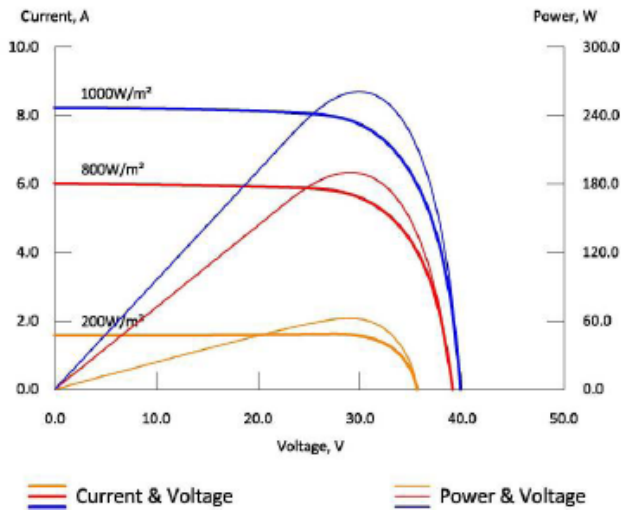

Electric Performance Typical Performance Characteristics		
Short Circuit Current Temperature Coefficient	mA/	+5.2
Open Circuit Voltage Temperature Coefficient	V/	-0.1415
Maximum Power Temperature Coefficient	%/	-0.4514
Performance Warranty :		
90%output, 12 Years		
80%output, 25 Years		

■ Quality Assurance

1. Electrical insulation test.
2. Outdoor exposure test.
3. Hot-spot endurance test.
4. UV-exposure.
5. Thermal cycling test.
6. Humidity freeze test
7. Damp heat test.
8. Robustness of terminations test.
9. Wet leakage current test.
10. Mechanical load test.
11. Hail impact test.
12. Bypass diode thermal test.

■ Physical Specifications

Dimension :

Length : 1803 mm / 70.98 in

Width : 995 mm / 39.17 in

Depth : 50 mm / 1.97 in


Weight : 22 kg / pcs

Packing :
10 pcs / carton

Loading Capacity :

240 pcs / 20ft container

480 pcs / 40ft container

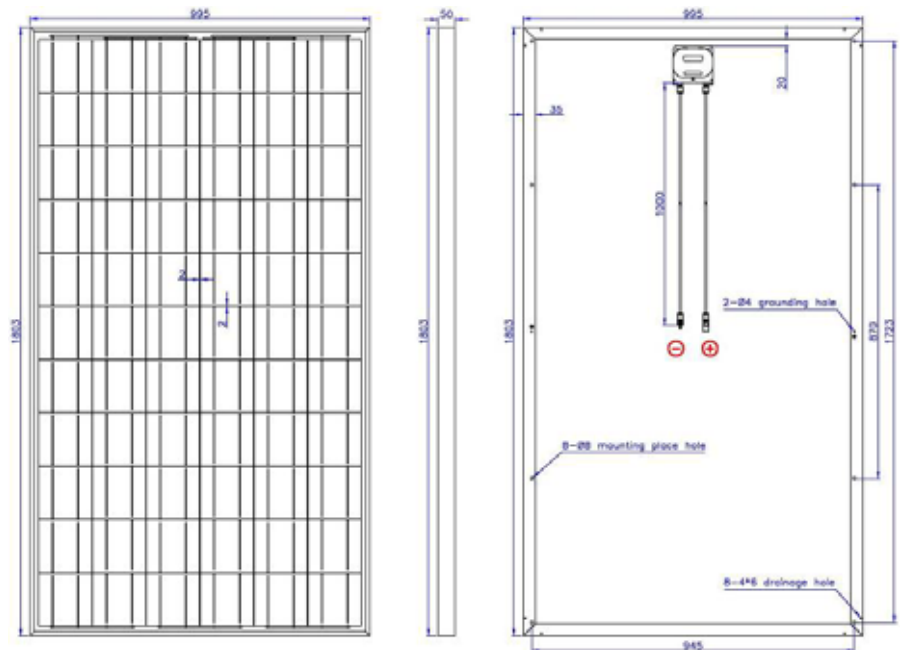

DJ Solar Co., Ltd.
www.dajing.com.tw

No.12, Chajhuan Rd, Gueishan Township Taoyuan
County 333, Taiwan, R.O.C
TEL : 886-3-3502848 FAX : 886-3-3502847
E-mail : service@dajing.com.tw